COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE	10-20-95	TR
A	REV PER ECN: 5515		

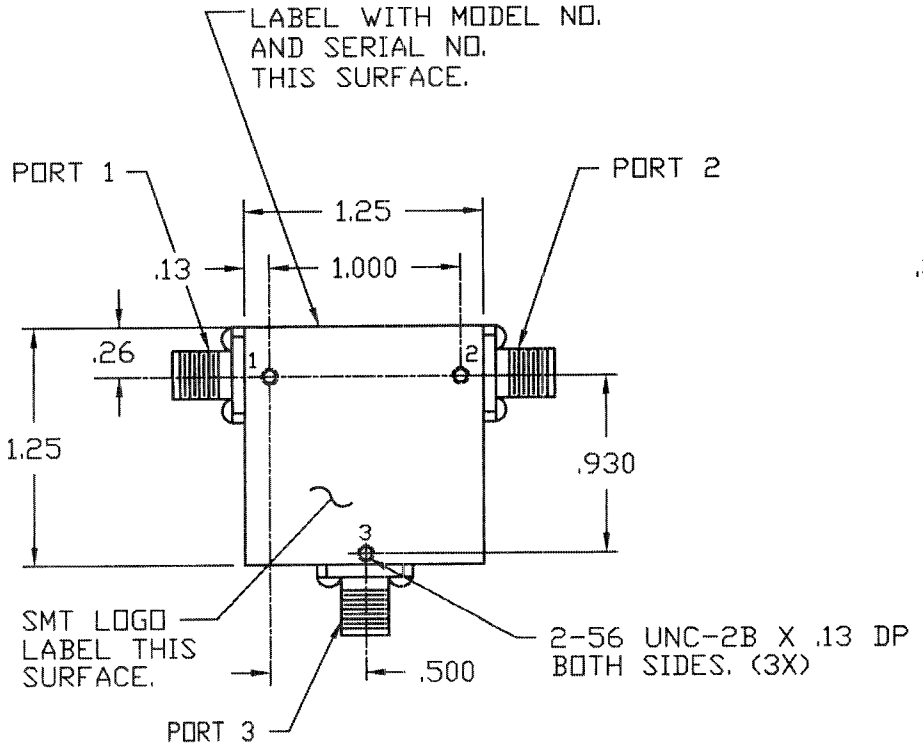

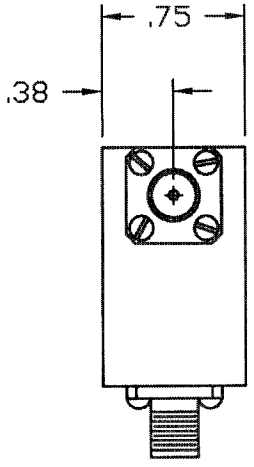

SPECIFICATIONS

1. FREQUENCY RANGE_____800 TO 1000 MHz
2. VSWR_____1.25:1 MAX
3. INSERTION LOSS_____0.4 dB MAX
4. TEMPERATURE_____-54° TO +85° C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE	SMA FEMALE
-3	SMA FEMALE	SMA FEMALE	SMA MALE
-4	SMA MALE	SMA MALE	SMA FEMALE
-5	SMA FEMALE	SMA MALE	SMA MALE
-6	SMA MALE	SMA MALE	SMA MALE
-7	SMA MALE	SMA FEMALE	SMA MALE

PART SMC0810 SHOWN WITH NO DASH NUMBER

ITEM	QTY. REQ'D	FSCM NO.	PART OR IDENTIFICATION NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST					

204-0292-001	SMC0810
LIST OF MAT'L	USED ON
APPLICATION	

CONTRACT NO.

APPROVALS	DATE
S. REED	10/18/95
TR	10-20-95

DO NOT SCALE DRAWING

SIERRA MICROWAVE TECHNOLOGY

TITLE:

OUTLINE FOR SMC0810-X

SIZE	FSCM NO.	DWG NO.	REV
B	1CY63	205-2130-001	A

SCALE | SHEET OF