


| | | | |
|------|-----------------|------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| NC | INITIAL RELEASE | | |

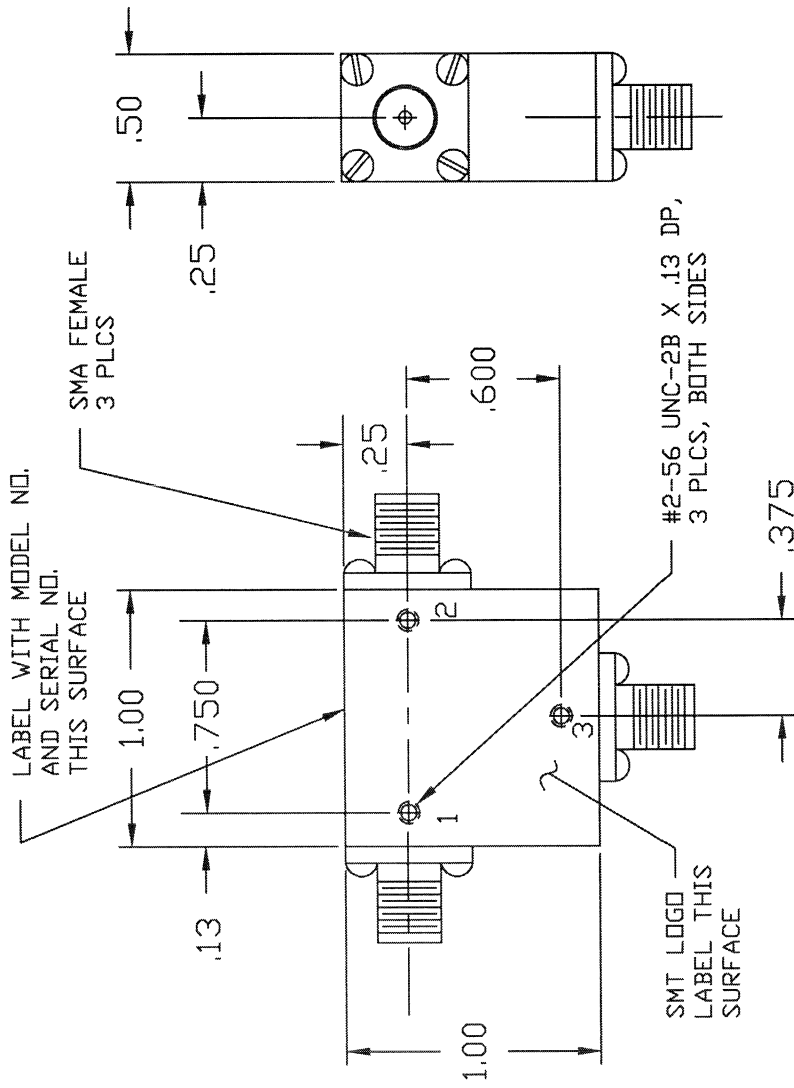

SPECIFICATIONS

1. FREQUENCY RANGE.....1.4 TO 1.6 GHZ
2. VSWR.....1.25:1 MAX
3. INSERTION LOSS.....0.4 dB MAX
4. TEMPERATURE.....-54° TO +85° C

| | | | |
|--|---------|-----------|--------------|
| SIERRA MICROWAVE TECHNOLOGY | | DATE | |
| | | APPROVALS | DATE |
| FRACTIONS DECIMALS ANGLES ± .XXX± .02 ± .XXX± .010 | | DRAWN | |
| MATERIAL | | CHECKED | |
| FINISH | | ISSUED | |
| 204-0259-001 | SMC1416 | SIZE | REV. |
| NEXT ASSY | USED ON | B | 1CY63 |
| APPLICATION | | DWG. NO. | 205-1856-001 |
| | | SCALE | |

| | |
|-----------------------------|--|
| SIERRA MICROWAVE TECHNOLOGY | |
| OUTLINE FOR SMC1416 | |