


COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS

REV.	DESCRIPTION	DATE	RELEASED BY
NC	INITIAL RELEASE	6-18-87	T.R.
A	REV PER ECN: 5515		

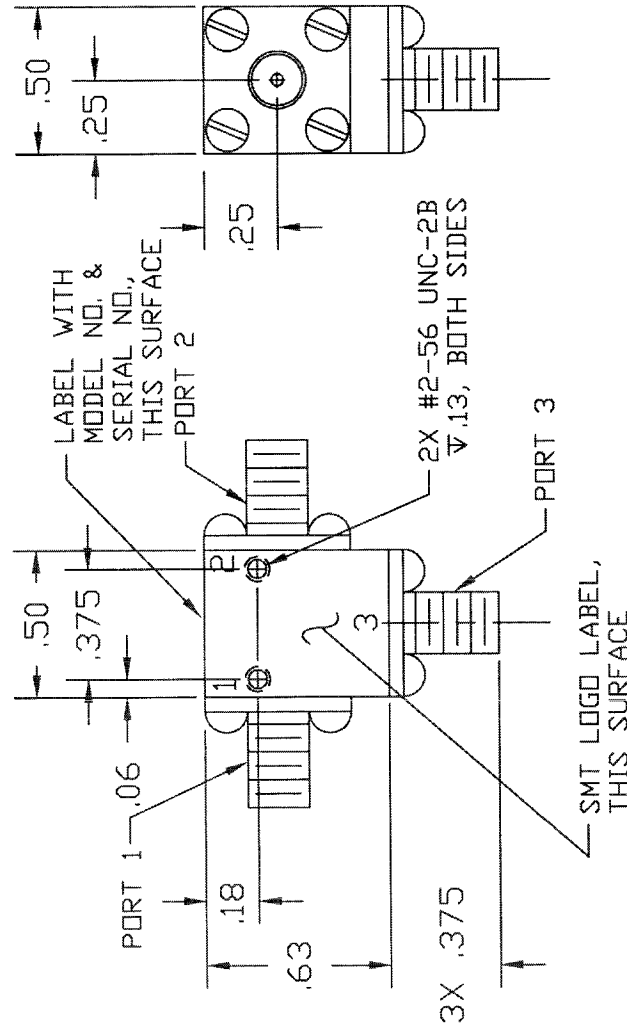

SPECIFICATIONS

1. FREQUENCY RANGE----- 15.0 TO 18.0 GHZ
2. VSWR----- 1.251 MAX
3. INSERTION LOSS----- 0.4 dB MAX
4. TEMPERATURE
 OPERATING----- -54° TO +125° C
 STORAGE----- -54° TO +125° C

DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE	SMA FEMALE
-3	SMA FEMALE	SMA FEMALE	SMA MALE
-4	SMA MALE	SMA MALE	SMA FEMALE
-5	SMA FEMALE	SMA MALE	SMA MALE
-6	SMA MALE	SMA MALE	SMA MALE
-7	SMA MALE	SMA FEMALE	SMA MALE

NOTE: PART SHOWN IS SMC1518 - NO DASH NO.

ITEM	QTY	FSCM	PART OR	NUMERICAL	MATERIAL
	REQ'D	NO.	IDENTIFICATION NO.	OR	SPECIFICATION
PARTS LIST					

CONTRACT NO.		DATE	
SIERRA MICROWAVE TECHNOLOGY		6-18-87	
APPROVALS		J. DARJES	
CHECKED		L. RODRIGUEZ	
DRAWN BY		L. RODRIGUEZ	
DATE		6-18-87	
SCALE		1:1	
TITLE:		OUTLINE FOR SMC1518-X	
REV		REV	
A		A	
SIZE		SIZE	
B		B	
FSCM NO.		FSCM NO.	
1CY63		205-0227-001	
DWG NO.		DWG NO.	
		205-0227-001	
REV		REV	
A		A	

ITEM	QTY	FSCM	PART OR	NUMERICAL	MATERIAL
	REQ'D	NO.	IDENTIFICATION NO.	OR	SPECIFICATION
APPLICATION					
DO NOT SCALE DRAWING					