


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	12/2/87
		APPROVED

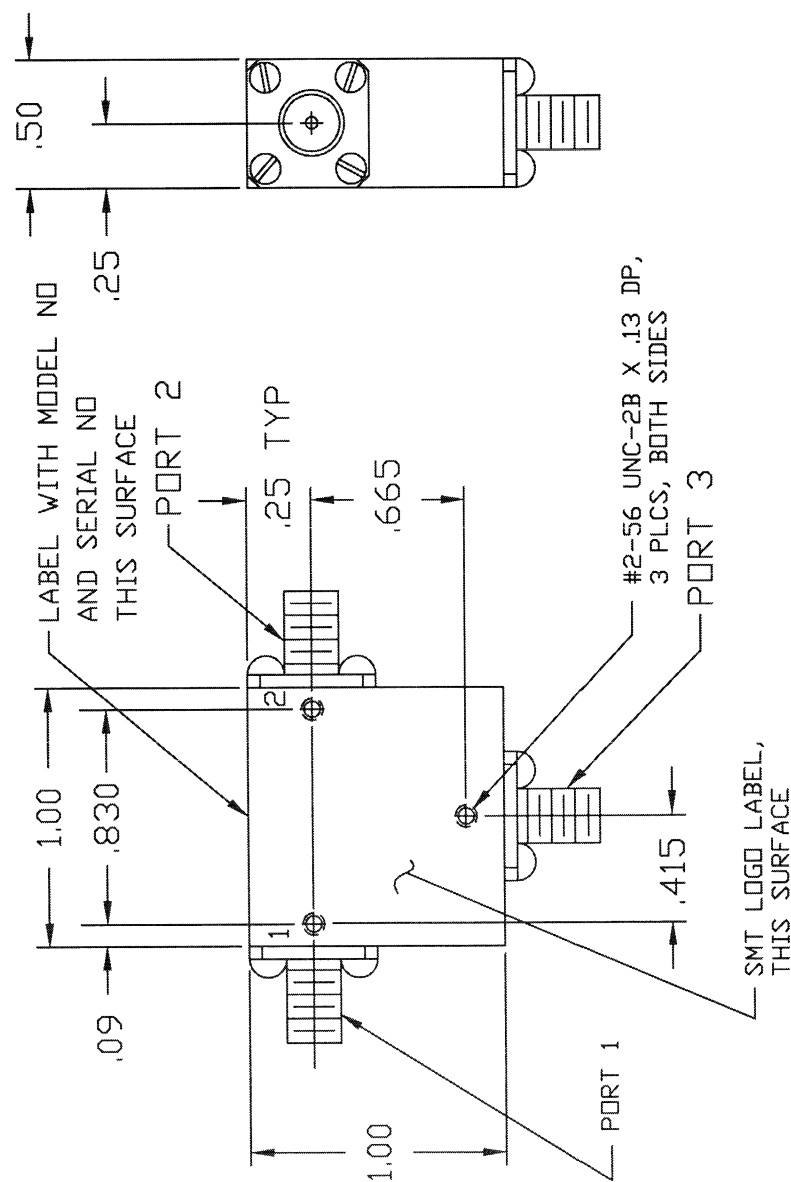

SPECIFICATIONS

1. FREQUENCY RANGE-----1.7 TO 2.1 GHz
2. VSWR-----1.25:1 MAX
3. INSERTION LOSS-----0.4 dB MAX
4. TEMPERATURE
OPERATING-----54° TO +85°C

DASH NO.	CONNECTOR ORIENTATION		
	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE	SMA FEMALE
-3	SMA FEMALE	SMA FEMALE	SMA MALE
-4	SMA MALE	SMA MALE	SMA FEMALE
-5	SMA FEMALE	SMA MALE	SMA MALE
-6	SMA MALE	SMA MALE	SMA MALE

PART DRAWN IS SMC1721 NO DASH NUMBER

QTY	FSCM REGD NO.	PART OR IDENTIFYING NO.	NUMERICAL OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS ±		DECIMALS .02 ±	ANGLES .001 ±	DATE
MATERIAL		APPROVALS		DATE
FINISH		DRAWN	CHECKED	
APPLICATION		ISSUED		
204-0325-001	SMC1721	USED ON		
NEXT ASSY				
APPLICATION		SIZE	FSCM NO.	DWG. NO.
		B	1CY63	205-2557-001
		SCALE		REV.



SIERRA MICROWAVE TECHNOLOGY
 OUTLINE FOR SMC1721-X