


COMPUTER GENERATED DRAWING  
MANUAL CHANGES NOT AUTHORIZED

REVISIONS	
REV.	DESCRIPTION
NC	INITIAL RELEASE
A	REV PER ECN: 5515 & 6966

DATE	RELEASED BY
1-23-88	T.R.

LABEL WITH MODEL NO  
AND SERIAL NO  
THIS SURFACE

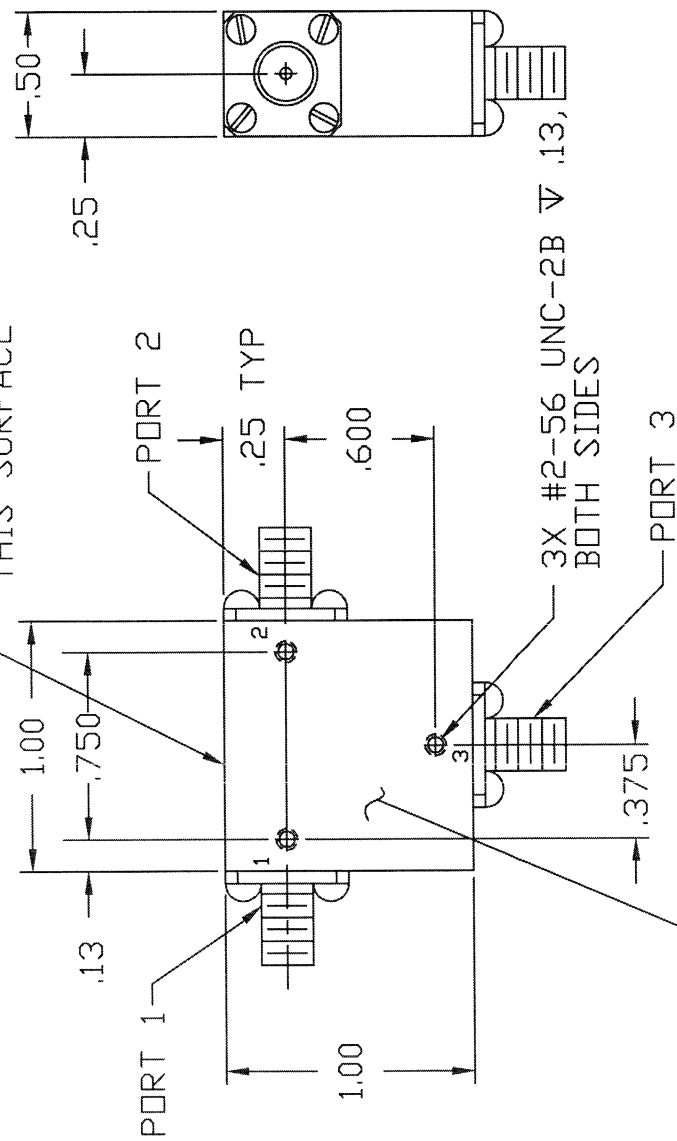

SPECIFICATIONS

FREQUENCY RANGE: 2.0 TO 2.3 GHz  
 VSWR: 1.25:1 MAX  
 INSERTION LOSS: 0.4 dB MAX  
 TEMPERATURE  
 OPERATING: -54° TO +85°C  
 STORAGE: -54° TO +85°C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE	SMA FEMALE
-3	SMA FEMALE	SMA FEMALE	SMA MALE
-4	SMA MALE	SMA MALE	SMA FEMALE
-5	SMA FEMALE	SMA MALE	SMA MALE
-6	SMA MALE	SMA MALE	SMA MALE
-7	SMA MALE	SMA FEMALE	SMA MALE

\*\* NOTE: PART SHOWN IS SMC2023 - NO DASH NO. \*\*

ITEM	QTY	PSGM	PART OR	NUMERICAL	MATERIAL
	REQ'D	NO.	IDENTIFICATION NO.	OR DESCRIPTION	SPECIFICATION
PARTS LIST					
CONTRACT NO.					
APPROVALS					
DATE					
DESIGNER: B. ALEXANDER 1-10-88					
CHECKER: J. DARR 1-15-88					
DESIGNER: T. RODRIGUEZ 1-23-88					
MKT & PRODUCTION					
DATE					
SIZE					
PSGM NO.					
DWG NO.					
REV					
A					

APPLICATION	
204-0391-001	SMC2023-6
204-0390-001	SMC2023-4,5,7
204-0389-001	SMC2023-1,2,3
204-0104-001	SMC2023
LIST OF MAT'L	USED ON

**SIERRA MICROWAVE TECHNOLOGY**

OUTLINE FOR SMC2023-X

DO NOT SCALE DRAWING

APPLICATION

USED ON

SMC2023

SMC2023-1,2,3

SMC2023-4,5,7

SMC2023-6