


COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS

REV.	DESCRIPTION	DATE	REPAIRED BY
NC	INITIAL RELEASE	3-18-87	T. R.
A	REV PER BLANKET ECN: 5515	3-11-99	M. T.
B	REV PER ECN: 6966		

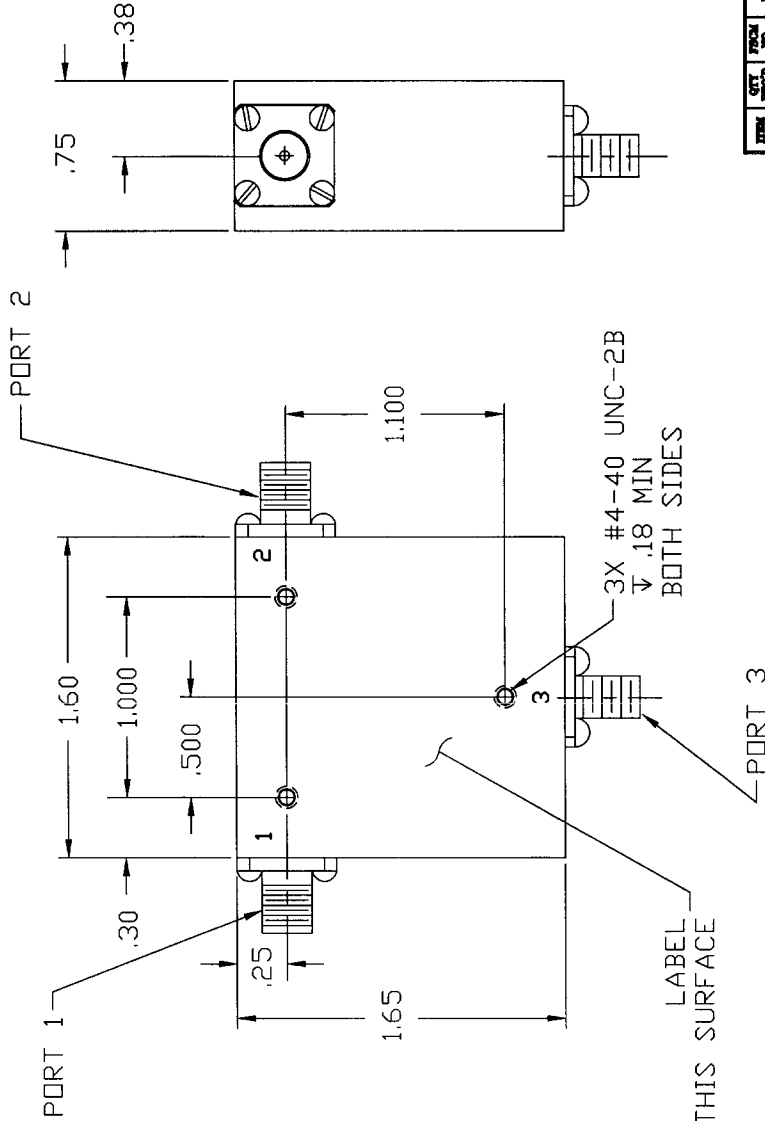

SPECIFICATIONS

1. FREQUENCY RANGE: 2.0 TO 4.0 GHZ
2. VSWR: 1.25:1 MAX
3. INSERTION LOSS: 0.4 dB MAX
4. TEMPERATURE:
 - OPERATING: -10° TO +65°C
 - STORAGE: -10° TO +65°C

DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE	SMA FEMALE
-3	SMA FEMALE	SMA FEMALE	SMA MALE
-4	SMA MALE	SMA FEMALE	SMA MALE
-5	SMA FEMALE	SMA MALE	SMA MALE
-6	SMA MALE	SMA MALE	SMA MALE
-7	SMA MALE	SMA FEMALE	SMA MALE

PART SHOWN IS SMC2040-ND DASH NUMBER.

ITEM	QTY	FROM INCL.	TO INCL.	PART OR IDENTIFICATION NO.	QUANTITIES OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST						
SIERRA MICROWAVE TECHNOLOGY 204-0346-001 204-0345-001 204-0194-001 204-0056-001 LIST OF MAT'L USED ON			CONTRACT NO. SMC2040-6 APPROVALS: J. DARJES 3-12-87 CHECKED: RODRIGUEZ 3-18-87 DRAWN BY: V.P. & P. HARRIS DATE: 3-18-87 TITLE: OUTLINE FOR SMC2040-X SIZE: B FSCM NO.: 1CY63 DWG NO.: 205-0181-001 REV: B			

SIERRA MICROWAVE TECHNOLOGY

OUTLINE FOR SMC2040-X

DO NOT SCALE DRAWING

APPLICATION