


COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS		DATE	RELEASED BY
REV.	DESCRIPTION		
NC	INITIAL RELEASE		
A	REV PER ECN: 5515		

LABEL WITH
MODEL NO. &
SERIAL NO.,
THIS SURFACE

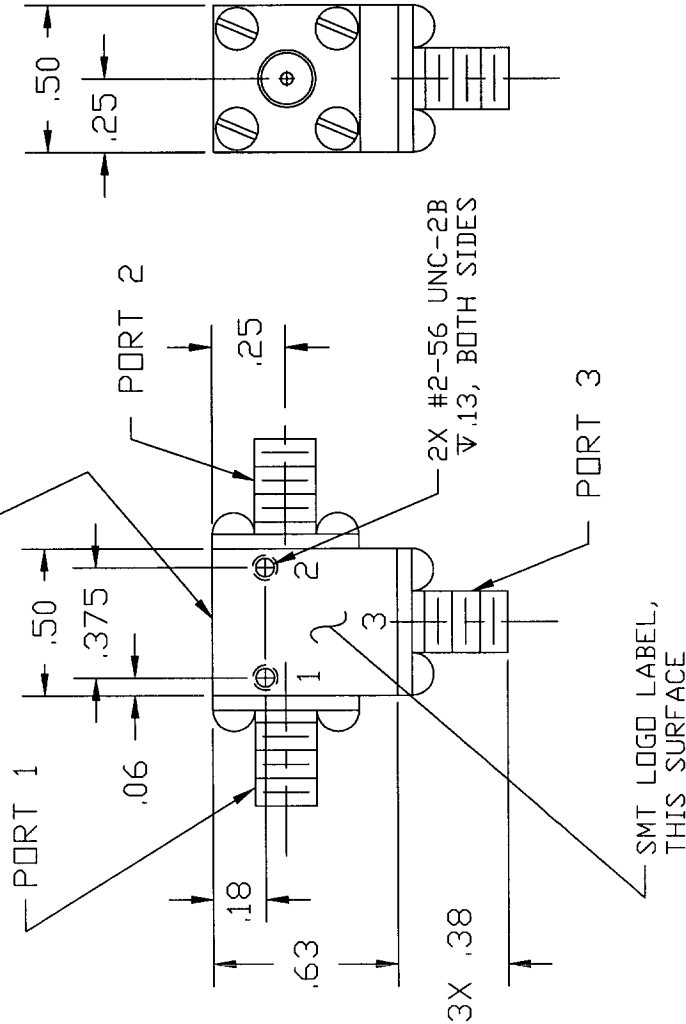

SPECIFICATIONS

1. FREQUENCY RANGE----- 26.0 TO 40.0 GHZ
2. VSWR----- 1.50:1 MAX
3. INSERTION LOSS----- 1.0 dB MAX
4. TEMPERATURE
OPERATING----- -54° TO +85° C
STORAGE----- -54° TO +85° C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	2.9mm FEMALE	2.9mm FEMALE	2.9mm FEMALE
-1	2.9mm MALE	2.9mm FEMALE	2.9mm FEMALE
-2	2.9mm FEMALE	2.9mm MALE	2.9mm FEMALE
-3	2.9mm FEMALE	2.9mm FEMALE	2.9mm MALE
-4	2.9mm MALE	2.9mm MALE	2.9mm FEMALE
-5	2.9mm FEMALE	2.9mm MALE	2.9mm MALE
-6	2.9mm MALE	2.9mm MALE	2.9mm MALE
-7	2.9mm MALE	2.9mm FEMALE	2.9mm MALE

ITEM	QTY	FROM	PART OR	MATERIAL
		REQD NO.	DESCRIPTION NO.	DESCRIPTION
PARTS LIST				
CONTRACT NO.				
APPROVALS				
DATE				
SIGNATURE				
DATE				
TITLE				
SIERRA MICROWAVE TECHNOLOGY				
OUTLINE FOR SMC2640-X				
SIZE				
FORM NO.				
REV				
DWG NO.				
REV				
SECRET				
OF				

ITEM	QTY	FROM	PART OR	MATERIAL
		REQD NO.	DESCRIPTION NO.	DESCRIPTION
CONTRACT NO.				
APPROVALS				
DATE				
SIGNATURE				
DATE				
TITLE				
SIERRA MICROWAVE TECHNOLOGY				
OUTLINE FOR SMC2640-X				
SIZE				
FORM NO.				
REV				
DWG NO.				
REV				
SECRET				
OF				