


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE		

LABEL WITH MODEL AND SERIAL NO. THIS SURFACE

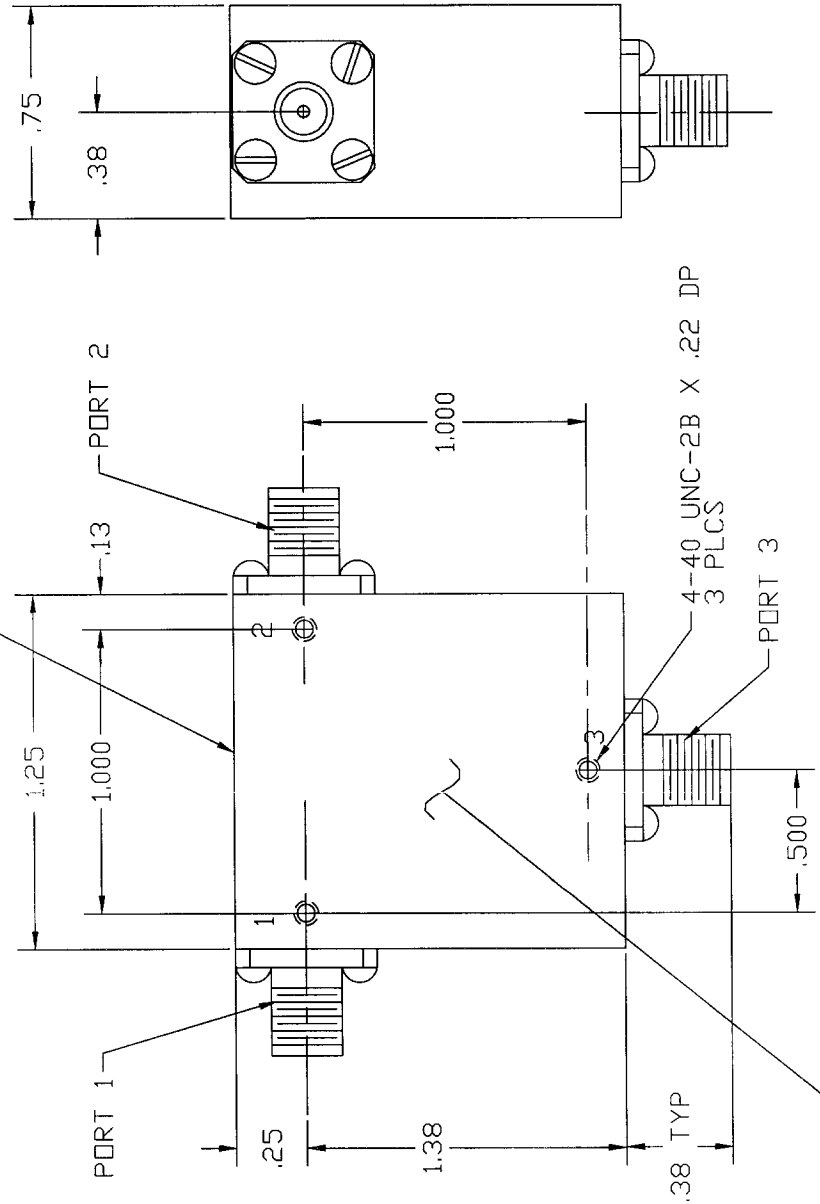

**SPECIFICATIONS:**

FREQUENCY: 2.6 TO 5.2 GHz  
 VSWR: 1.30:1 MAX  
 INSERTION LOSS: 0.5 dB MAX  
 TEMPERATURE:  
 OPERATING: -30° TO +70°C  
 STORAGE: -54° TO +100°C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE	SMA FEMALE
-3	SMA FEMALE	SMA FEMALE	SMA MALE
-4	SMA MALE	SMA MALE	SMA FEMALE
-5	SMA FEMALE	SMA MALE	SMA MALE
-6	SMA MALE	SMA MALE	SMA MALE

NOTE: PART DRAWN IS SMC2652 (NO DASH NO.)

QTY	FSCM RECD. NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES # .XXX .02 ± .XXX± .010 ±		DATE		
MATERIAL		APPROVALS		
FINISH		DRAWN		
NEXT ASSY		CHECKED		
USED ON		ISSUED		
APPLICATION		SHEET		



SIERRA MICROWAVE TECHNOLOGY

OUTLINE FOR SMC2652-X

SIZE	FSCM NO.	DWG. NO.	REV.
B	1CY63	205-2600-001	