


COMPUTER GENERATED DRAWING MANUAL CHANGES NOT AUTHORIZED		REVISIONS	
REV.	DESCRIPTION	DATE	RELEASED BY
NC	INITIAL RELEASE		

## SPECIFICATIONS

1. FREQUENCY RANGE-----3.0 TO 6.0 GHZ
2. VSWR-----1.30:1 MAX.
3. INSERTION LOSS-----0.5 dB MAX.
4. TEMPERATURE  
 OPERATING----- -30° TO +70° C  
 STORAGE----- -65° TO +125° C

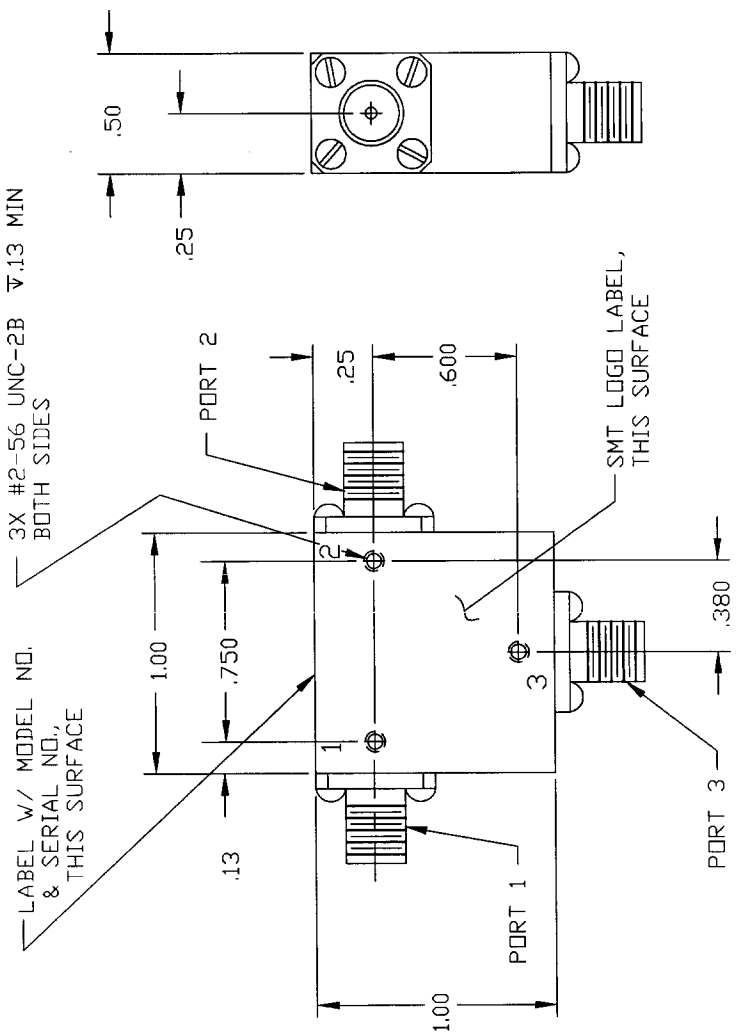

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	SMA FEMALE
-1	SMA MALE	SMA FEMALE	SMA FEMALE
-2	SMA FEMALE	SMA MALE	SMA FEMALE
-3	SMA FEMALE	SMA FEMALE	SMA MALE
-4	SMA MALE	SMA MALE	SMA FEMALE
-5	SMA FEMALE	SMA MALE	SMA MALE
-6	SMA MALE	SMA MALE	SMA MALE
-7	SMA MALE	SMA FEMALE	SMA MALE

NOTE: PART SHOWN IS SMC3060 - NO DASH NUMBER

ITEM	QTY	FROM INVENTORY	PART OR IDENTIFICATION NO.	MANUFACTURE OR SOURCE	MATERIAL SPECIFICATION
PARTS LIST					
VALUE CONTRACTING CORP. 10000 WILSON BLVD FARMERS BRANCH, TEXAS 75438 PHONE: 214-291-1111			CONTRACT NO. SMC3060-6 APPROVALS: E. SWEAT 2-14-00 DATE: 2-14-00 CHECKED: _____ DATE: _____ DRAWN: _____ DATE: _____ SCALED: _____ DATE: _____		
SMC3060-6 SMC3060-4, 5, & 7 SMC3060-1, 2, & 3 SMC3060 USED QTY			SIERRA MICROWAVE TECHNOLOGY OUTLINE FOR SMC3060-X SIZE FROM NO. B DWG NO. 205-3101-001 SCALE: _____ SHEET: _____ OF _____		
DO NOT SCALE DRAWING					