REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

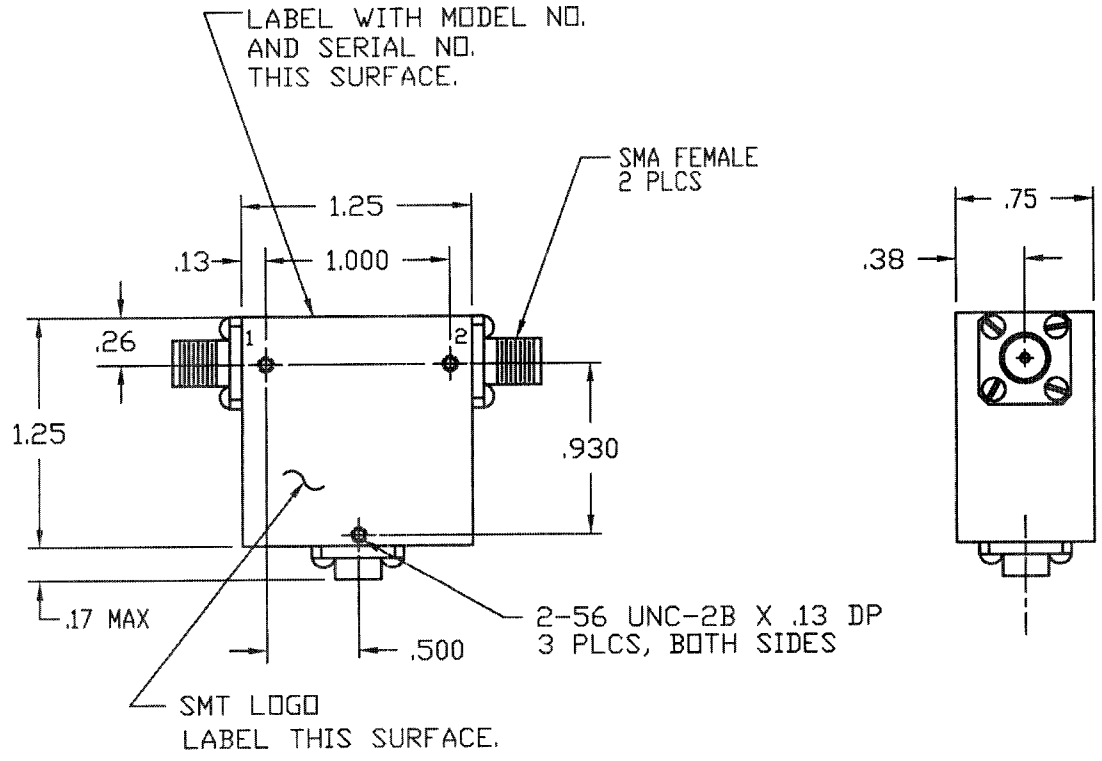

SPECIFICATIONS

FREQUENCY RANGE:	700 TO 800 MHz
VSWR:	1.25:1 MAX
ISOLATION:	20 dB MIN
INSERTION LOSS:	0.4 dB MAX
TEMPERATURE:	
OPERATING	-20° TO -65°C
STORAGE	-55° TO +100°C
LOAD RATING:	10 WATTS MAX

QTY REQD	FSCM NO.	PART OR IDENTIFING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				

204-0287-001	SMI0708
NEXT ASSY	USED ON
APPLICATION	

FRACTIONS DECIMALS ANGLES
± .XX± .02 ±
.XXX± .010

MATERIAL

FINISH

APPROVALS	DATE
DRAWN	
CHECKED	
ISSUED	

SIERRA MICROWAVE TECHNOLOGY

OUTLINE FOR SMI0708

SIZE	FSCM NO.	DWG. NO.	REV.
B	1CY63	205-2054-001	NC

SCALE SHEET