


COMPUTER GENERATED DRAWING  
MANUAL CHANGES NOT AUTHORIZED

REV.	DESCRIPTION	DATE	RELEASED BY
NC	INITIAL RELEASE	3-26-93	T.R.
A	REV PER ECN: 4481	8-24-94	T.R.
B	REV PER ECN: 5515	12-29-98	M.T.
C	REV PER ECN: 7300		

LABEL WITH MODEL NO.  
AND SERIAL NO.  
THIS SURFACE.

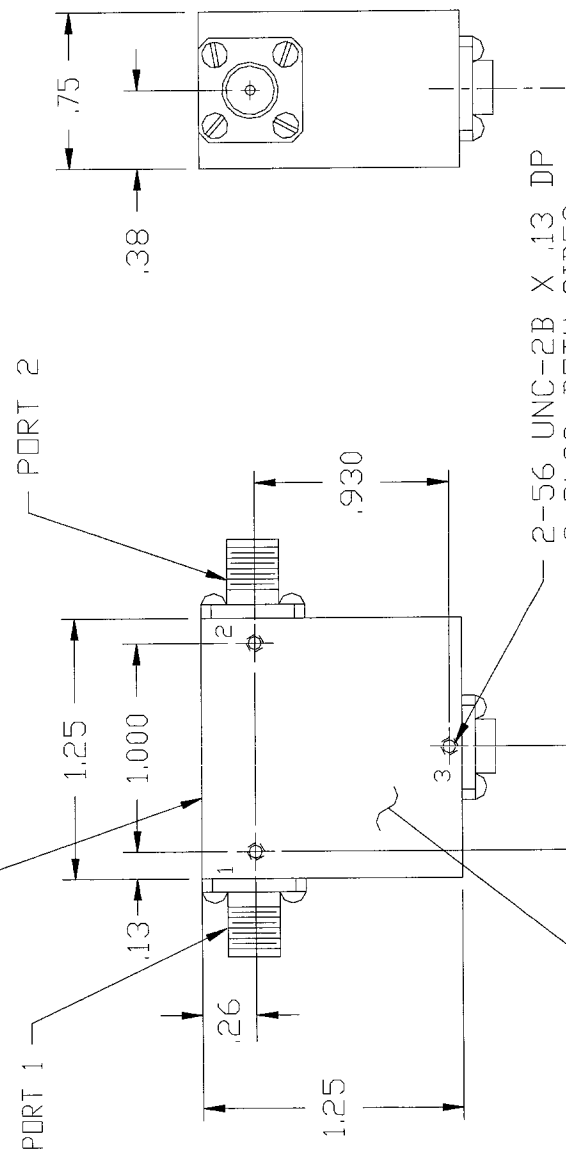

SPECIFICATIONS

FREQUENCY RANGE: 800-1000 MHz  
 VSWR: 1.25:1 MAX  
 ISOLATION: 20 dB MIN  
 INSERTION LOSS: 0.4 dB MAX  
 TEMPERATURE: -54° TO +85°C

DASH NO.	PORT 1	PORT 2	PORT 3
None	SMA FEMALE	SMA FEMALE	TERMINATED
-1	SMA MALE	SMA FEMALE	TERMINATED
-2	SMA FEMALE	SMA MALE	TERMINATED
-3	SMA MALE	SMA MALE	TERMINATED

\*\* NOTE: PART DRAWN IS SMI0810 - NO DASH NO. \*\*

ITEM	QTY	REQ'D	FSCM NO.	PART OR IDENTIFICATION NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST						
204-0563-001		SMI0810-3		CONTRACT NO.		
204-0562-001		SMI0810-1,-2		SIERRA MICROWAVE TECHNOLOGY		
204-0213-001		SMI0810-X		TITLE:		
LIST OF MAT'L		USED ON		OUTLINE FOR SMI0810-X		
APPROVALS				DATE	SIZE	
DRAWN: SCHIRMER				8-23-94	B	FSCM NO.
CHECKED:					1CY63	DWG NO.
DESIGN ENG.						205-1373-001
MAT. & PROCESS				T.R.		REV
Q.A.						C
FINISH:						
DO NOT SCALE DRAWING						
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .xxx .02 * .xxx .010				MATERIAL:		
MATERIAL:				SCALE:		
APPLICATION				SHEET OF		
				15/01/2002		
				09:41:16		