
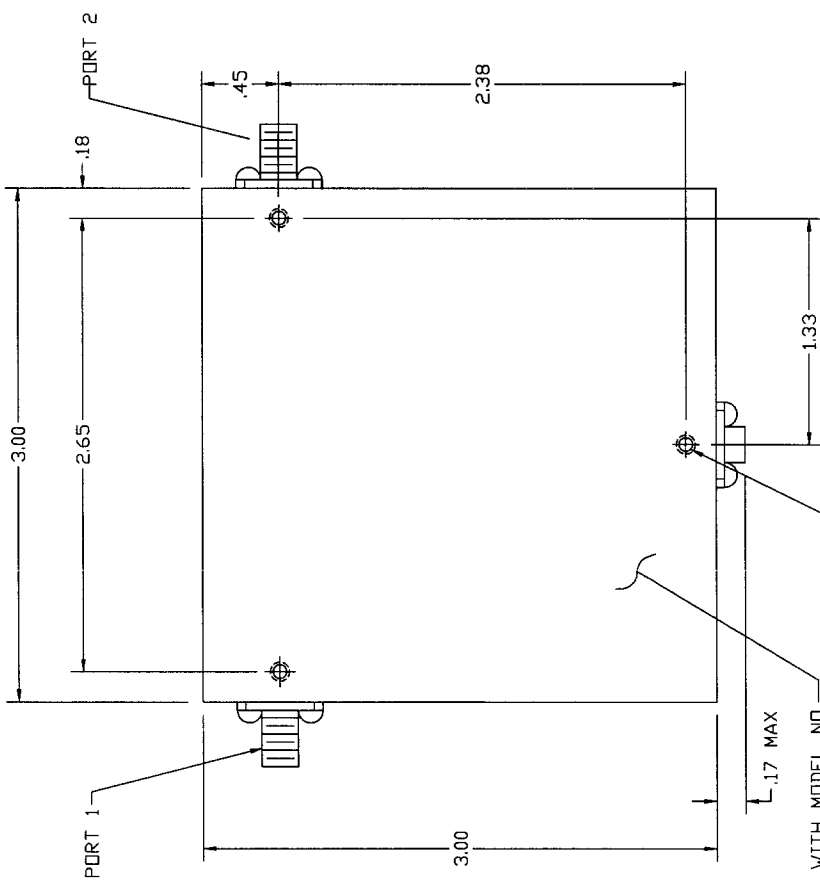


REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	
A	REV PER ECN: 5515	

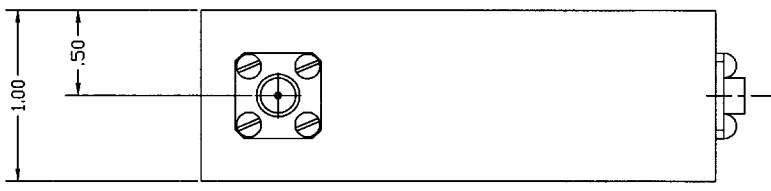

LABEL WITH MODEL NO. AND SERIAL NO. THIS SURFACE

4-40 UNC-2B x .20 DP
3 PLCS

SPECIFICATIONS

1. FREQUENCY 0.8 TO 2.0 GHZ
2. VSWR 1.6: MAX
3. ISOLATION 13 dB MIN
4. INSERTION LOSS 1.2 dB MAX
5. TEMPERATURE
 OPERATING +10°C TO +40°C
 STORAGE -20°C TO +65°C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	TERMINATED
-1	SMA MALE	SMA FEMALE	TERMINATED
-2	SMA FEMALE	SMA MALE	TERMINATED
-3	SMA MALE	SMA MALE	TERMINATED

QTY	FSCM RECD NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES .XXX ± .XXXX ± .000 ±		APPROVALS DATE		
MATERIAL		DRAWN		
FINISH		CHECKED		
NEXT ASSY		ISSUED		
APPLICATION		SCALE		
204-0321-001		SHEET		
SMI0820		DIVG. NO. 205-2488-001		
USED ON		REV.		



SIERRA MICROWAVE TECHNOLOGY
 OUTLINE FOR SMI0820-X