


COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS

REV.	DESCRIPTION	DATE	RELEASED BY
NC	INITIAL RELEASE	2-28-86	T.R.
A	REV PER ECN: 5515		

3X #4-40 UNC-2B
▽.18 MIN. BOTH SIDES

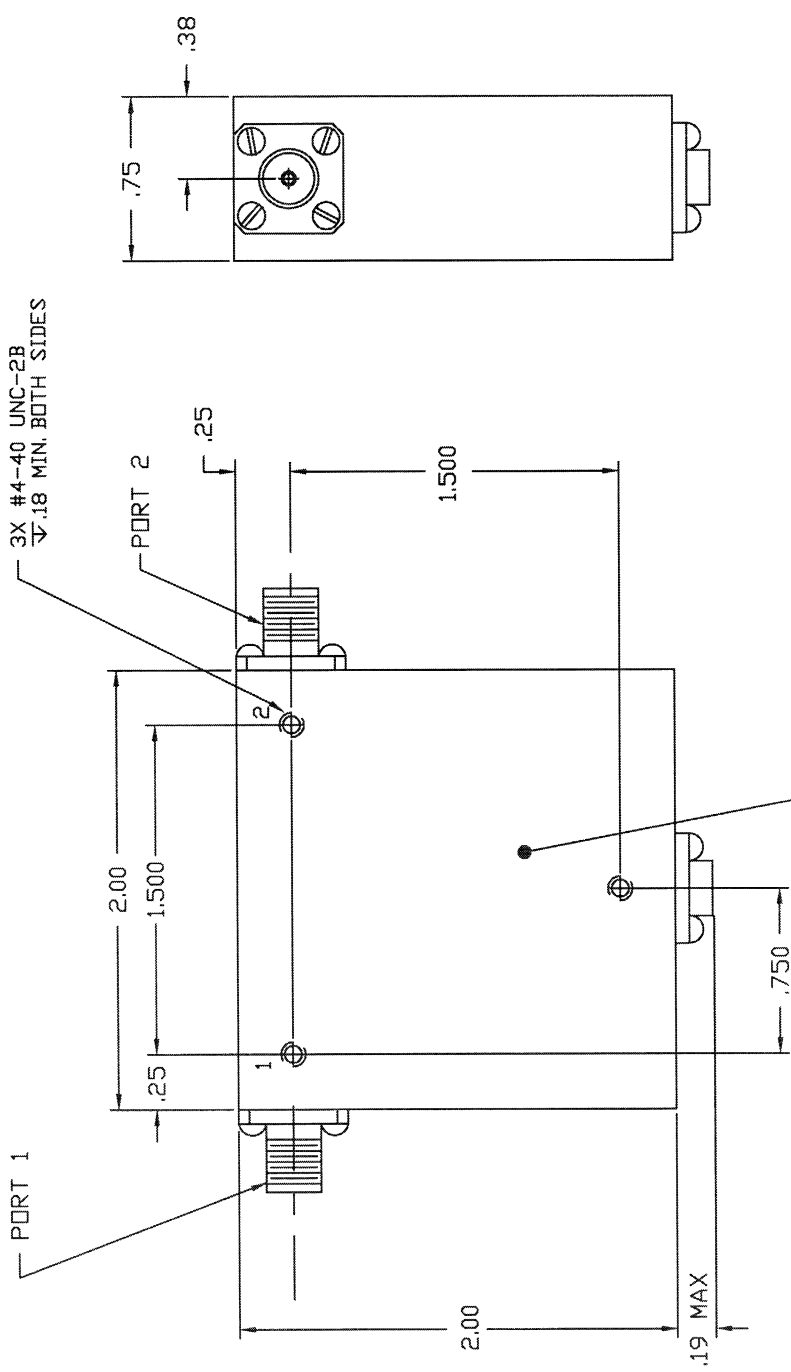

SPECIFICATIONS

1. FREQUENCY RANGE.....1.7 TO 2.4 GHZ
2. VSWR.....1.25:1 MAX.
3. ISOLATION.....20 dB MIN.
4. INSERTION LOSS.....0.4 dB MAX.
5. TEMPERATURE.....0° TO +50°C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	TERMINATED
-1	SMA MALE	SMA FEMALE	TERMINATED
-2	SMA FEMALE	SMA MALE	TERMINATED
-3	SMA MALE	SMA MALE	TERMINATED

* PART DRAWN IS SMI1724- NO DASH NUMBER.

ITEM	QTY	FROM	FRY	DATE	BY	DESCRIPTION	MATERIAL

CONTRACT NO.		DATE	
SIERRA MICROWAVE TECHNOLOGY		2-28-86	
APPROVALS		DATE	
T.R.		2-26-86	
CHECKED		DATE	
T.R.		2-26-86	
DRAWN		DATE	
T.R.		2-26-86	
SCALE		DATE	
1:1		2-26-86	
TITLE		DATE	
OUTLINE FOR SMI1724-X		2-26-86	
SIZE		DATE	
B		205-0036-001	
REV		DATE	
A		205-0036-001	
SHEET		DATE	
OF		205-0036-001	

ITEM	QTY	FROM	FRY	DATE	BY	DESCRIPTION	MATERIAL
204-0560-001						SMI1724-3	
204-0559-001						SMI1724-1,-2	
204-0075-001						SMI1724	
LIST OF MAT'L		USED ON		APPLICATION			

DO NOT SCALE DRAWING