


REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE		

LABEL W/ MODEL NO. & SERIAL NO., THIS SURFACE

#2-56 UNC-2B X .13 DP, 3 PLCS, BOTH SIDES

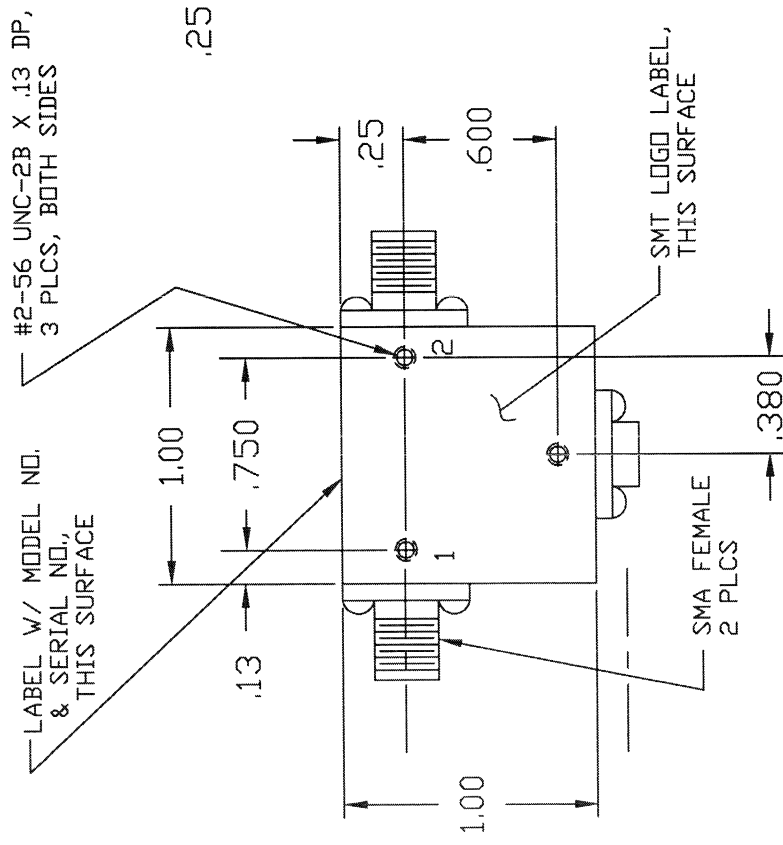

### SPECIFICATIONS

1. FREQUENCY RANGE.....3.7 TO 4.8 GHZ
2. VSWR.....1.25:1 MAX.
3. ISOLATION.....20 dB MIN.
4. INSERTION LOSS.....0.3 dB MAX.
5. TEMPERATURE
  - OPERATING.....-20° TO +65° C
  - STORAGE.....-54° TO +85° C

SIERRA MICROWAVE TECHNOLOGY		DATE	
		APPROVALS	
FRACTIONS DECIMALS ANGLES ± .XXX .02 ± .XXX± .010		DATE	
MATERIAL		DRAWN: STALEY	
FINISH		CHECKED	
APPLICATION		ISSUED	
204-0268-001	SMT3748	OUTLINE FOR SMT3748	
NEXT ASSY	USED ON	SIZE	REV.
		B	1CY63
		DWG. NO.	205-1938-001
		SCALE	